



## AUTOMATIC PAT-TRAP® WOBBLE SETTINGS

The PAT-TRAP® with Wobble can be used in any of the following modes:

### STATIONARY

X Singles  
X Doubles

### OSCILLATING HORIZONTAL

X Singles  
X Doubles

### OSCILLATING VERTICAL

X Singles  
X Doubles

### OSCILLATING HORIZONTAL/VERTICAL

X Singles  
X Doubles


The PAT-TRAP® with Wobble has an interrupter for the horizontal and vertical modes.

NOTE: If the machine is located inside a trap house, oscillating doubles targets may hit the trap house walls.

## WOBBLE ANGLES

Left/Right Angle = 8" => 50°  
Down Angle = 7° Min

Left/Right Angle = 10" = 60°  
Up Angle = 25 1/2 ° Max

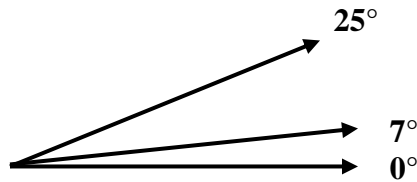



**PAT-TRAP, Inc.**

**\*Choice of the ATA\***

632 Western Avenue • Henniker, New Hampshire 03242 • Tel. (603) 428-3396 • Fax (603) 428-7340